

Nozzle Diffusers

Description

For supply air, having fully adjustable rotating nozzles which give total flexibility of the air distribution. The high induction effect of each nozzle ensures comfortable conditions within the occupied zone.

Construction

From pressed sheet steel with 360° rotating nozzles, supplied as standard in RAL 9010.


Size and Weight

Available in 595 x 595mm overall to suit a standard lay-in ceiling grid.

How to Specify

STATE QUANTITY, THE PRODUCT CODING AND THE SIZE WIDTH X HEIGHT


e.g. 10 Qty. 87N2K+6C 595 x 595mm overall.

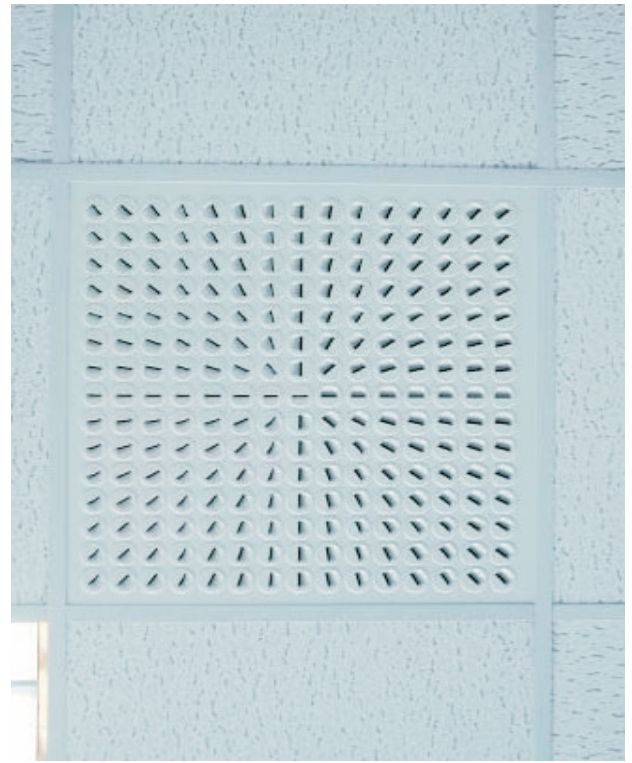


Frame Style	Product Type	Options	Accessories
87 Diffuser	N Adjustable Nozzles	2 Side Inlet Plenum	0 None
		1 Top Inlet Plenum	K Flat Plate Damper
		0 None	



Fixings	Finish
4 External Drop Rod Lugs	B PPC RAL 9010 White
6 Lay-in Tile Replacer	C PPC BS / RAL Colour

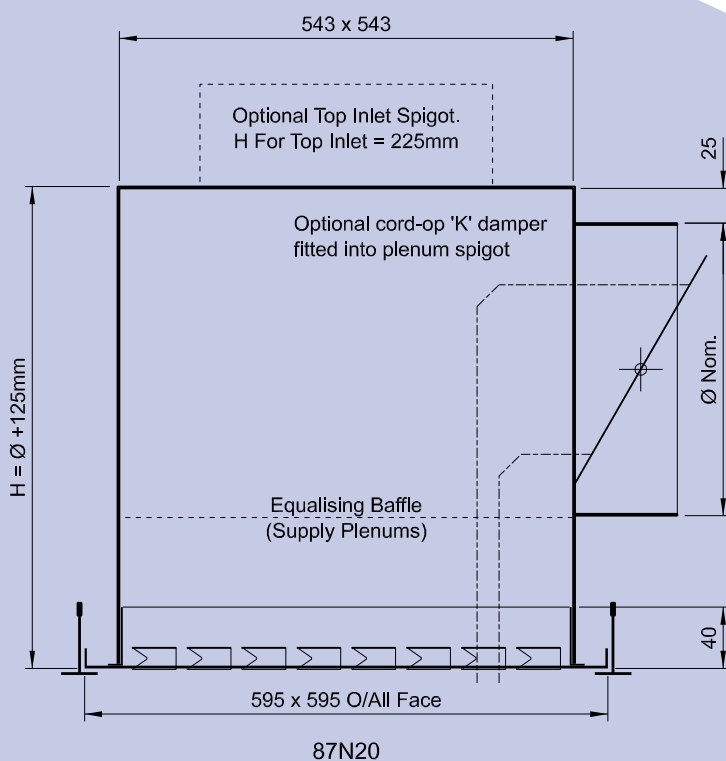

Supply Performance Data

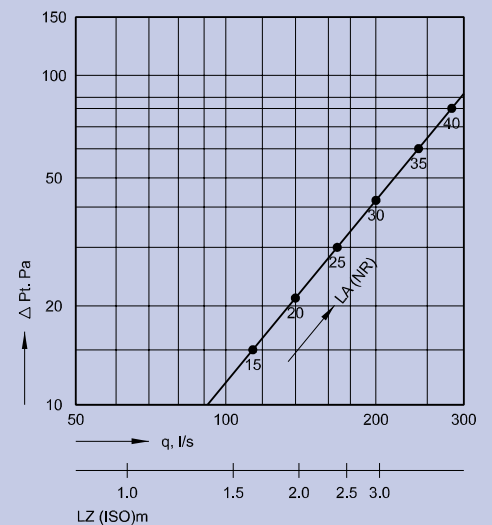

LZ (ISO)m = Minimum distance from diffuser to wall without exceeding an air velocity of 0.2m/s at isothermal temperature.